



SNME Heatshrinkable Tubing **Medium Wall Adhesive Coated**

Application

The SNME tubes are manufactured from high grade polyolefin and are irradiation cross linked.

The SNME Tubing is a medium wall, co-extruded, adhesive coated, heat-shrinkable sleeve, for general applications for the insulation of cables and conductors.


They are well suited for the insulation of cable conductors and moisture proofing of cable jacketing.

Features

- High strength and excellent resilience
- Good mechanical strength
- Excellent adhesion to plastic and metals
- High UV resistance
- Good weatherability
- Excellent chemical resistance




TECHNICAL INFORMATION

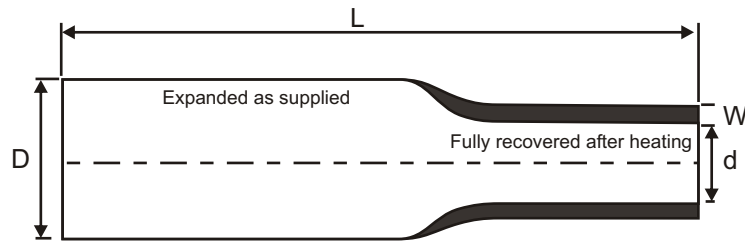

| Part Code | Description | Inside Diameter (mm) | | MOQ |
|------------|--------------------|-----------------------|--------------------------|-----|
| | | As supplied Min. D | After recovery Max. d | |
| PH103-1510 | SNME 6/2 - 1000 | 4.8 | 2.2 | 5pc |
| PH103-1520 | SNME 9/3 - 1000 | 3.3 | 7.2 | 5pc |
| PH103-1030 | SNME 12/3 - 1000 | 9.6 | 3.3 | 5pc |
| PH103-1540 | SNME 16/5 - 1000 | 12.8 | 4.4 | 5pc |
| PH103-1050 | SNME 27/8 - 1000 | 22.4 | 6.6 | 5pc |
| PH103-1060 | SNME 34/7 - 1000 | 24.8 | 8.8 | 5pc |
| PH103-1070 | SNME 40/12 - 1000 | 32.8 | 13.2 | 5pc |
| PH103-1080 | SNME 50/16 - 1000 | 16.5 | 38.4 | 5pc |
| PH103-1090 | SNME 56/18 - 1000 | 44.8 | 19.8 | 5pc |
| PH103-1110 | SNME 70/23 - 1000 | 60 | 25.3 | 5pc |
| PH103-1130 | SNME 95/29 - 1000 | 72 | 31.9 | 5pc |
| PH103-1200 | SNME 115/34 - 1000 | 104 | 37 | 5pc |
| PH103-1210 | SNME 130/36 - 1000 | 107 | 40 | 5pc |
| PH103-1220 | SNME 140/42 - 1000 | 137 | 45 | 5pc |
| PH103-1230 | SNME 160/50 - 1000 | 145 | 55 | 5pc |

SNME 28 / 6 - 1000

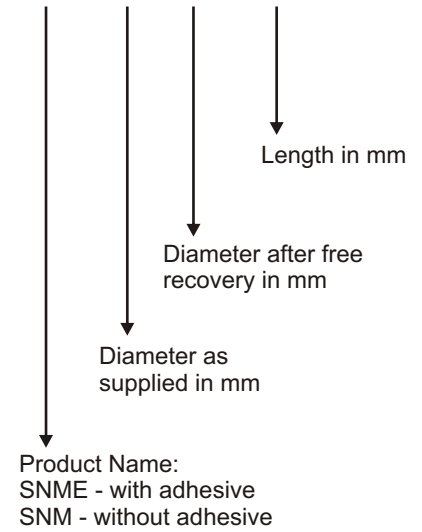

Approvals: Various European Telephone Authorities

Availability: In lengths of 1 metre or cut length

Colour: Black