



GP Heatshrinkable Tubing **Multi-Purpose Thinwall** **Heatshrinkable Tubing**

Application

GP tubes are heatshrinkable tubing manufactured from cross linked polyolefin.

The tubing will shrink and conform to irregular shapes when heated to a temperature above 115°C. GP tube's are flexible, flame retarded and UL listed except for GP clear which is not flame retarded.


GP tubes have excellent physical, chemical and electrical properties. Applications include insulation, identification, wire strain relief and protective covering for components.

Features

- Good mechanical strength
- High UV resistance
- Good weatherability
- Excellent chemical resistance



TECHNICAL INFORMATION

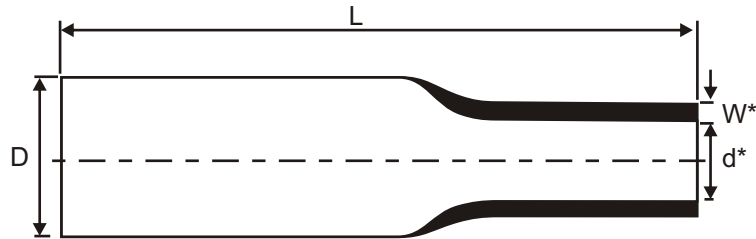

Part Code	Description	Inside Diameter (mm)		MOQ
		As supplied Min. D	After recovery Max. d	
EH100-01XX	H/S Thin Wall GP 1.2/0.6	0.96	0.66	10m
EH100-02XX	H/S Thin Wall GP 1.6/0.8	1.28	0.88	10m
EH100-03XX	H/S Thin Wall GP 2.4/1.2	1.92	1.32	10m
EH100-04XX	H/S Thin Wall GP 3.2/1.6	2.56	1.76	10m
EH100-05XX	H/S Thin Wall GP 4.8/2.4	4	2.75	10m
EH100-06XX	H/S Thin Wall GP 6.4/3.2	5.5	3.3	10m
EH100-07XX	H/S Thin Wall GP 9.6/4.8	8.2	4.95	10m
EH100-08XX	H/S Thin Wall GP 12.7/6.4	10.7	6.6	10m
EH100-09XX	H/S Thin Wall GP 16/8	13.6	8.8	10m
EH100-10XX	H/S Thin Wall GP 19/10	16.2	11	10m
EH100-11XX	H/S Thin Wall GP 25/12	21.5	13.2	10m
EH100-12XX	H/S Thin Wall GP 32/16	27.5	17.6	10m
EH100-13XX	H/S Thin Wall GP 38/19	32.5	22	10m
EH100-14XX	H/S Thin Wall GP 51/26	42.5	27.5	10m
EH100-15XX	H/S Thin Wall GP 76/38	65	41	10m
EH100-16XX	H/S Thin Wall GP 101/50	85	56	10m

COLOUR CODES for XX:

Black	00	
Red	02	
Yellow	04	
Green	05	
Blue	06	
White	09	
Clear	10	
Yellow/Green	11	(Earth)

Example:

EH100-1306 Blue GP 38.0/19.0